

☐ Order N° _____ ☐ Quotation
 Date _____ Signature _____
 Customer Ref. _____ User's weight Kg _____

PAGE 1/2
 May 2025

Dealer _____

Key

☐ standard

☐ option

- L** Seat width ☐ 34 ☐ 36 ☐ 38 ☐ 40 ☐ 42 ☐ 44 ☐ 46 ☐ 48
- P** Seat depth ☐ 36 ☐ 38 ☐ 40 ☐ 42 ☐ 44 ☐ 46 ☐ 48
- HS** Back-rest height ☐ 27 ☐ 29 ☐ 31 ☐ 33 ☐ 35 ☐ 37 ☐ 39
- HA** Front seat/floor height ☐ 46 ☐ 48 ☐ 50
- HP** Rear seat/floor height ☐ 40 ☐ 42 ☐ 44 ☐ 46
- DP** Foot-rest/seat distance ☐ 35 ☐ 37 ☐ 39 ☐ 41 ☐ 43 ☐ 45 ☐ 47 ☐ 49 cm

Colore telaio

- ☐ Metallic grey ☐ Pearl white
☐ Glossy black ☐ Matte black

- ☐ ----- (see "Colours" catalogue) from:
☐ Neon green ☐ Neon orange

①


Upholstery

- ☐ Tension adjustable nylon backrest
☐ Tension adj. breathable backrest
☐ Without any backrest upholstery
☐ **SAMEKH** (separate order form)

②

FENICE

Aluminium rigid frame

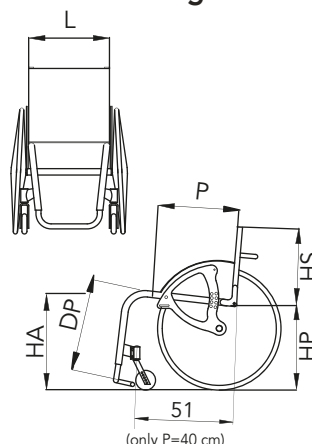

Single tubular foot-plate & Front frame

(**) height adjustable only with Y shaped or straight front frame

☐ Open (**)

☐ Carbon fibre closed (**)

☐ Tilt adjustable carbon fibre closed (with with Y or V shaped front frame)

☐ Standard footrest colour: same as frame colour


☐ Y

☐ Straight front frame


☐ V

③


Pushing handles




☐ Without any pushing handles



☐ Standard pushing handles




☐ Height adj. pushing handles



☐ Foldable pushing handles


④

Distance between the hub centre and back-rest



- ☐ 7 cm ☐ 13 cm
☐ 9 cm (standard) ☐ 15 cm
☐ 11 cm


Back-rest tilt



- ☐ 89°
☐ 91° (standard)
☐ 93°

⑥

Front opening angle



- ☐ 90° (standard) (A = 16 cm)
☐ 95° (A = 22 cm)

(approximate standard measures)

⑦


Rear wheel camber

- ☐ 1° ☐ 2° ☐ 3° ☐ 4°

- ☐ Quick release axles Ø12mm with 42 cambered bushes (default)
☐ Q.r.a. Ø 1/2" (12,7 mm) w/42 camb.bushes
☐ Q.r.a. Ø 1/2" (12,7 mm) w/50 camb.bushes

⑧


Side guards



- ☐ Carbon fibre ☐ Plastic

⑨

"L" arm-rest, detachable, h 22cm



Elbow-rest

- ☐ Tubular
☐ Straight (26 cm long)
☐ Classic (23 cm long)
☐ Classic (30 cm long)


⑩

Brakes

☐ Standard


☐ Composite

☐ Scissor brakes



⑪

Revolving anti tip device



☐ Right

☐ Left

⑫

Notes

☐ Order N° _____ ☐ Quotation
Date _____ Signature _____
Customer Ref. _____

PAGE 2/2
May 2025

FENICE

Dealer

Rear wheels

- ☐ 24" Ultralight (24 spokes)
☐ 24" Light (24 spokes)
☐ 24" Star 6x3 (18 spokes, silver or black)
☐ 24" (36 spokes)
☐ 24" Mountain-bike with Citybike tyre
☐ 24" Mountain-bike with Offroad tyre
☐ 24" Spinergy LX
spokes colour.....(black def.)
☐ 25" Spinergy LX
spokes colour.....(black def.)
☐ 25" Light (24 spokes) black

Tyres

- ☐ Pneum. Marathon Plus
☐ Pneum. high pressure Smooth
☐ Pneum. high pressure Plugged 24"
☐ Pn.Schwalbe Right Run 24"
☐ Solid black KIK 24"
not available for Ultralight wheels

Pushrims

- ☐ Aluminium silver
☐ Aluminium dark
☐ OVAAL alum. silver 24"
☐ OVAAL alum. dark 24"
☐ OVAALG(dark w/silicon ins.)24"
☐ Chromium-plated steel 24"
☐ Rubber coated
☐ Titanium
☐ Carbolife CURVE L24"
☐ CL Curve L TetraGrip 24"
☐ CL Quadro rubber ctd 24"
☐ Carbolife GEKKO 24"
☐ Silicon covers

OVAAL/S/G only in size 24"
Only OVAAL/GEKKO available for Star6x3
OVAAL & Carbolife not available for MTB

Spokeguards


- ☐ Transparent 24"
☐ Black 24"
☐ Fantasy
code pattern
(see catalogue of spokeguards)

Front castors

- ☐ 80 (3") solid
☐ 80 (3") solid with lights
☐ 100 (4"x1.1/4) solid with plastic rim
☐ 100 (4"x1) solid with lights
☐ 100 (4"x1.1/4) solid with alum. rim
☐ 125 (5"x1.1/4) solid with plastic rim
☐ 125 (5"x1.1/4) solid with alum. rim
☐ 125 (5"x1) solid with lights
☐ 150 (6") pneumatic
☐ 150 (6") solid


Backrest bar

- ☐ Standard:
P(bar) 7,5cm;
H(bar) 19cm;
dia 21mm.




- ☐ Custom:
P.....cm;
H.....cm.


Pockets



- ☐ Small under the seat



- ☐ Big under the seat



- ☐ On the back-rest

Lined cushion

in foam polyurethane



- ☐ 3 cm high
☐ 5 cm high

Anodized set

(Rear wheel rims & hubs if LIGHT 24",
sideguard supports, forks and fittings)

- ☐ Black
☐ Silver
☐ Light blue
☐ Red
☐ Orange
☐ Cyclamen light purple

(only 24" Light wheels)

Options

- 21 ☐ "M+F" velcro strips (hook and loop) on seat
22 ☐ "M" velcro strips (hook) on seat
23 ☐ "F" velcro strips (loop) on seat
24 ☐ Padded rigid cushion h 5
25 ☐ Chest harness
26 ☐ Chest belt
27 ☐ Abductor belt
28 ☐ Catheter holder pocket
29 ☐ Rx ☐ Lx Crutch holder
30 ☐ Pump for pneumatics
31 ☐ Suitcase holder
32 ☐ 45° pelvic belt
33 ☐ 45° padded pelvic belt
34 ☐ Black backpack
35 ☐ Front protective covers

Notes