

☐ Order N° _____ ☐ Quotation
 Date _____ Signature _____
 Customer Ref. _____ User's weight Kg _____

PAGE 1/2
 May 2024

Dealer _____

Key


☐ standard

☐ option

L Seat width	☐ 34	☐ 35	☐ 36	☐ 37	☐ 38	☐ 39	☐ 40	☐ 41
	☐ 42	☐ 43	☐ 44	☐ 45	☐ 46	☐ 47	☐ 48	
P Seat depth	☐ 34	☐ 36	☐ 38	☐ 40	☐ 42	☐ 44	☐ 46	☐ 48
	☐ 50							
HS Back-rest height	☐ 27	☐ 29	☐ 31	☐ 33	☐ 35	☐ 37	☐ 39	
HA Front seat/floor height	☐ 40	☐ 41	☐ 42	☐ 43	☐ 44	☐ 45	☐ 46	
	☐ 47	☐ 48	☐ 49	☐ 50	☐ 51	☐ 52		
HP Rear seat/floor height	☐ 37	☐ 38	☐ 39	☐ 40	☐ 41	☐ 42	☐ 43	
	☐ 44	☐ 45	☐ 46	☐ 47	☐ 48	☐ 49	☐ 50	
DP Foot-rest/seat distance	☐ 35	☐ 36	☐ 37	☐ 38	☐ 39	☐ 40	☐ 41	
	☐ 42	☐ 43	☐ 44	☐ 45	☐ 46	☐ 47		

HEKA

Ergonomic Titanium custom rig.frame

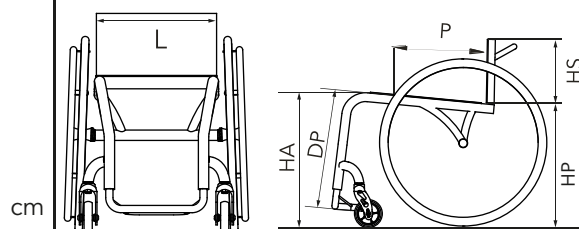

Frame colour (including forks if varnished)

- ☐ **Natural titanium** ☐ **Shiny titanium**
- ☐ Matte black ☐ Glossy black
- ☐ Matte purple ☐ Metallic blue
- ☐ Matte London smoke ☐ Metallic grey
- ☐ Tiffany ☐ Champagne
- ☐ Matte green ☐ Pearl white
- ☐ Colour (see "Colour catalogue") (excluded comouflage, neon, RAL, changing col.)
- ☐ Neon colour starting from:
- ☐ RAL/Changing col./Camouflage.....shiny or matte, from:

①

Backrest: Upholstery

- ☐ Tension adjustable nylon
- ☐ Coloured (nylon)..... colours: orange, red, green, cornflower, light blue
- ☐ Breathable tension adjustable
- ☐ Coloured (breathable colours: red, grey).....
- ☐ Without any backrest upholstery
- ☐ **AMEKH** (separate order form)
- ☐ other seating system
- Seat:**
- ☐ Fix (stand.)
- ☐ Rigid in carbon fibre

②

Tubular single titanium footplate

③

- ☐ Open ☐ CRB closed ☐ Tilt adjust. CRB
- available only if the front frame is **straight** or **Y shaped**

Pushing handles


- ☐ Without any pushing handles
- ☐ Fixed pushing handles
- ☐ Foldable pushing handles
- ☐ Height adjustable pushing handles

④

Distance between the hub centre and back-rest COG (range from 0cm to 15cm max)


⑤

- ☐ cm 0
- ☐ cm.....
- ☐ cm 15



Front frame angle

⑥



- ☐ **83° (default)**
 A = 16 cm, with DP 41 cm
- ☐ 75° A = 19 cm, with DP 41 cm

Rear wheel camber

⑦

- ☐ 1° ☐ 2° ☐ 3° ☐ 4°
- ☐ Quick release axles Ø12mm with 42 cambered bushes (default)
- ☐ Quick release axles Ø 1/2" (12,7 mm) with 42 mm cambered bushes
- ☐ Quick release axles Ø 1/2" (12,7 mm) with 50mm cambered bushes

Carbon fiber side-guards with foldable backrest:

⑧

- ☐ fix with CRB wing (def.)
- ☐ fix with straight CRB
- ☐ detachable with CRB wing
- ☐ detachable with straight CRB




Carbon fiber side-guards with welded backrest:

- ☐ fix with CRB wing (def.)
- ☐ fix with straight CRB



Backrest tilt


⑨



- ☐ Foldable and tilt adjustable backrest (side-guards can be fix or removable)
- ☐ Welded, fix backrest (side-guards can be only fix)

Revolving anti-tip device

⑩




- ☐ Right
- ☐ Left

Brakes

⑪

- ☐ composite
- ☐ Scissor
- ☐ standard



Notes

Dealer _____

☐ Order N° _____ ☐ Quotation
 Date _____ Signature _____
 Customer Ref. _____

PAGE 2/2
 May 2024

HEKA

Rear wheels

12

- ☐ 24" Ultralight (24 spokes)
☐ 24" Light (24 spks) ** see section 15 f/colours
☐ 24" Star 6x3 (18 spokes, silver or black)
☐ 24" (36 spokes)
☐ 24" Mountain-bike with Citybike tyre
☐ 24" Mountain-bike with Offroad tyre
☐ 24" Spinergy LX
 spokes colour.....(black def.)
☐ 25" Spinergy LX
 spokes colour.....(black def.)
☐ 25" Light (24 spokes) black

Tyres

- ☐ Pneum. Marathon Plus
☐ Pneum. high pressure Smooth
☐ Pneum. high pressure Plugged 24"
☐ Pn.Schwalbe Right Run 24"
☐ Solid black KIK 24"
 not available for Ultralight wheels

Pushrims

13

- ☐ Aluminium silver
☐ Aluminium dark
☐ OVAAL alum. silver 24"
☐ OVAAL alum. dark 24"
☐ OVAALG(dark w/silicon ins.)24"
☐ Rubber coated
☐ Titanium
☐ Carbolife CURVE L24"
☐ CL Curve L TetraGrip 24"
☐ CL Quadro rubber ctd 24"
☐ Carbolife GEKKO 24"
☐ Silicon covers

OVAAL/S/G only in size 24"
 Only OVAAL/GEKKO available for Star6x3
 OVAAL & Carbolife not available for MTB

Spokeguards

14

- ☐ Transparent 24"
☐ Black 24"
☐ Fantasy

 code pattern
 (see catalogue of spokeguards)

Anodized set
(forks & Light wheels 24")

15

- ☐ Black
☐ Silver
☐ Light blue
☐ Red
☐ Orange
☐ Cyclamen light purple

Front castors

16

- ☐ 80 (3") solid
☐ 80 (3") solid with lights
☐ 100 (4"x1.1/4) solid with plastic rim
☐ 100 (4"x1) solid with lights
☐ 100 (4"x1.1/4) solid with alum. rim
☐ 125 (5"x1.1/4) solid with plastic rim
☐ 125 (5"x1.1/4) solid with alum. rim
☐ 125 (5"x1) solid with lights

Lined cushion
in foam polyurethan

17



- ☐ 3 cm high
☐ 5 cm high

STANDARD
SEAT

(carbon fibre rigid seat only suitable for standard seat)

ERGO SEAT



18

Inclined backrest bar

21

- ☐ Standard: dia 22mm
 P (bar) 7,5cm;
 H (bar) 19cm.


- ☐ Custom:
 H (bar).....cm

Pockets

19

☐ Small under the seat

or


☐ Hanging from seat☐ Big under the seat☐ Backrest pocket

Options


- 22 ☐ "M+F" velcro strips (hook and loop) on seat
 23 ☐ "M" velcro strips (hook) on seat
 24 ☐ "M" velcro for Vicair
 25 ☐ "F" velcro strips (loop) on seat
 26 ☐ Catheter holder pocket
 27 ☐ Pump for pneumatics
 28 ☐ 45° pelvic belt
 29 ☐ 45° padded pelvic belt
 30 ☐ Black backpack
 31 ☐ Front protective covers

Front frame shape

20

☐ V shaped front frame

The CRB tilt adjustable footplate only
 is suitable with the V shaped front frame

☐ STRAIGHT front frame

Straight front frame or Y shaped front frame are
 suitable with any type of footplate

☐ Y shaped front frame

Technical drawing sent for approval on:approved on:.....
 Notes: _____