

☐ Order N° _____ ☐ Quotation
Date _____ Signature _____
Customer Ref. _____ User's weight Kg _____

PAGE 1/2
May 2024

Dealer

Key

☐ standard

☐ option

☐ QUASAR GT Fix axle



☐ QUASAR GT Adj axle

L Seat width ☐ 34 ☐ 36 ☐ 38 ☐ 40 ☐ 42 ☐ 44
P Seat depth ☐ 36 ☐ 38 ☐ 40 ☐ 42 ☐ 44 ☐ 46
HS Back-rest height ☐ 27 ☐ 29 ☐ 31 ☐ 33 ☐ 35 ☐ 37 ☐ 39 ☐ 41
HA Front seat/floor height ☐ 46 ☐ 48 ☐ 50
HP Rear seat/floor height ☐ 40 ☐ 42 ☐ 44 ☐ 46 ☐ 48
DP Foot-rest/seat distance ☐ 37 ☐ 39 ☐ 41 ☐ 43 ☐ 45 ☐ 47 ☐ 49 cm

crash
tested

QUASAR GT

Titanium rigid frame



Frame colour

- ☐ Shiny titanium ☐ Glossy black
☐ Pearl white ☐ Matte black
☐ Natural titanium
☐ (see "Colours" catalogue)
☐ Neon green ☐ Neon orange


Back-rest: Upholstery

- ☐ Tension adj nylon
☐ Breathable tension adj
☐ Without any backrest uph.
☐ **FAMEKH**
☐ other seating system.....
- Seat:**
☐ Fix (standard, screws)
☐ Tension adj. (velcro)
☐ Carbon fibre

Backrest upholstery colour


- ☐ Black
☐ Coloured (nylon).....
colours: orange, red, green, cornflower, light blue
☐ Coloured (breathable).....
colours: red, grey)

Single tubular titanium footplate

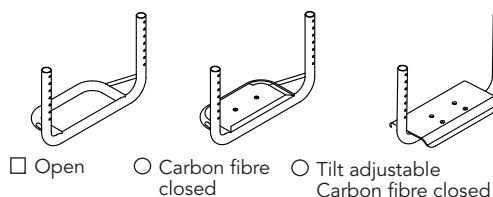


- ☐ Open ☐ Carbon fibre closed ☐ Tilt adjustable Carbon fibre closed

Push handles

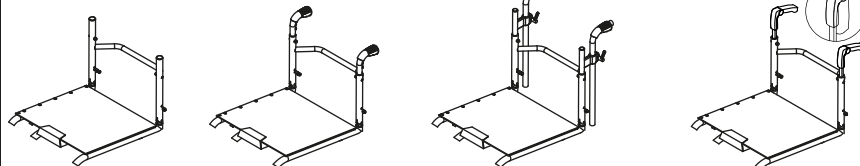


- ☐ Without pushing handles ☐ Fixed pushing handles ☐ Height adjustable pushing handles ☐ Foldable pushing handles

Distance between the hub centre and back-rest




- ☐ 9 cm (standard) ☐ 7 cm
☐ 0 cm (biamputated) ☐ 11 cm
☐ 3 cm ☐ 13 cm
☐ 5 cm

Backrest tilt



- ☐ 89°
☐ 91° (standard)
☐ 93°

Front angle



- ☐ 83° (standard) (A = 16 cm)
☐ 75° (A = 21 cm)

Rear wheel camber

- ☐ 1° ☐ 2°
☐ 3° ☐ 4°

- ☐ Quick rel. axles Ø 12mm with cambered bushes length 42 mm (default)
☐ Quick rel. axles Ø 1/2" (12,7mm) w/42mm bushes
☐ Quick rel. axles Ø 1/2" (12,7mm) w/50mm bushes

Side-guards



- ☐ Aluminium with carbon fibre wing



- ☐ Aluminium with straight carbon fibre


Security belt (included)

Car fastening stickers (included)

Brakes




- ☐ Scissor brake
☐ Composite



- ☐ Standard
☐ Pull brake

Anti-tip device



- ☐ Right
☐ Left

Notes

☐ Order N° _____ ☐ Quotation
 Date _____ Signature _____
 Customer Ref. _____

PAGE 2/2
 May 2024

QUASAR GT

Dealer

Rear wheels

14

- ☐ 24" Ultralight (24 spokes)
☐ 24" Light (24 spokes)
☐ 24" Star 6x3 (18 spokes, silver or black rim)
☐ 24" (36 spokes)
☐ 24" Mountain-bike with Citybike tyre
☐ 24" Mountain-bike with Offroad tyre
☐ 24" Spinergy LX
 spokes colour.....(black def.)
☐ 25" Spinergy LX
 spokes colour.....(black def.)
☐ 25" Light (24 spokes) black

Tyres

- ☐ Pneum. Marathon Plus
☐ Pneum. high pressure Smooth
☐ Pneum. high pressure Plugged 24"
☐ Pn.Schwalbe Right Run 24"
☐ Solid black KIK 24"
 not available for Ultralight wheels

Pushrims

15

- ☐ Aluminium silver
☐ Aluminium dark
☐ Chromium-plated steel 24"
☐ Rubber coated
☐ Titanium
☐ OVAAL (silver aluminium)
☐ OVAALS (dark aluminium)
☐ OVAALG (w/sil.insert)
☐ CarboLife CURVE L 24" *
☐ CL Curve L TetraGrip 24" *
☐ CL Quadro rubber ctd 24" *
☐ CarboLife GEKKO 24" *
☐ Silicon covers 24"

* All OVAAL & CL pushrims: not suitable for MTB wheels
 * Only OVAAL & GEKKO suitable for Star 6x3 wheels

Spokes guards

16

- ☐ Transparent 24"
☐ Black 24"
☐ Fantasy
 code pattern
 (see catalogue of spokeguards)

Lined cushion
 in foam polyurethan

18



- ☐ 3 cm high
☐ 5 cm high


Front castors

17

- ☐ 80 (3") solid
☐ 80 (3") solid with lights
☐ 100 (4"x1.1/4) black solid with plastic rim
☐ 100 (4"x1) solid with lights
☐ 100 (4"x1.1/4) solid with alum. rim
☐ 125 (5"x1.1/4) black solid with plastic rim
☐ 125 (5"x1.1/4) solid with alum. rim
☐ 125 (5"x1) solid with lights
☐ 150 (6") pneumatic
☐ 150 (6") solid

Pockets

19

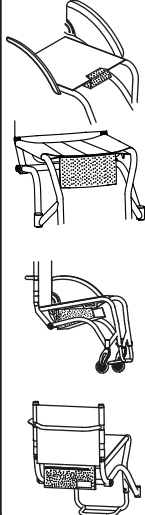

- ☐ Small under the fix seat
 or
☐ Small hanging from the seat
☐ Big under the seat
☐ On the back-rest

Anodized set

(Rear wheel rims & hubs if LIGHT 24",
 sideguard supports, forks and fittings)


20

- ☐ Black
☐ Silver
☐ Light blue
☐ Red
☐ Orange
☐ Cyclamen light purple

(only 24" Light wheels)

Backrest bar

21




- ☐ Standard:
 P(bar) 7,5cm;
 H(bar) 19cm;
 dia 19mm.
☐ Custom:
 P.....cm;
 H.....cm;

Options

- 23 ☐ "M+F" velcro strips (hook and loop) on seat
 24 ☐ "M" velcro strips (hook) on seat
 25 ☐ "F" velcro strips (loop) on seat
 26 ☐ Padded rigid cushion h 5
 27 ☐ Chest harness
 28 ☐ Chest belt
 29 ☐ Abductor belt
 30 ☐ Catheter holder pocket
 31 ☐ Rx ☐ Lx Crutch holder
 32 ☐ Pump for pneumatics
 33 ☐ Black backpack
 34 ☐ Front protective covers

☐ **STANDARD SEAT**

* Carbon fibre rigid seat
 (only suitable for standard seat)



☐ **ERGO SEAT**




22

7,0 kg configuration (FIXED)
7,4 kg configuration (ADJ.)


- Wheelchair 38x40x31 cm
 - Nylon upholstery
 - Tit. frame colour: Shiny titanium
 - Open foot-rest
 - No pushing handles
 - Aluminium side guards with carbon fibre wing
 - Scissor brakes
 - Ultralight wheels
 - Pneum. high press. smooth tyres
 - Ultralight handrims
 - 80 mm front castors
 - No pockets
 Max load: 100 kg

☐ **"Y" SHAPED FRONT FRAME (stand.)**




- ☐ Custom front opening
cm

☐ **"V" SHAPED FRONT FRAME**



(The tilt adjustable footplate only is suitable with the "V" shaped front frame)

☐ **STRAIGHT FRONT FRAME**



(Standard front frame for seat width of 34cm)