

☐ Order N° _____ ☐ Quotation
 Date _____ Signature _____
 Customer Ref. _____ User's weight Kg _____

PAGE 1/2
May 2024

Dealer _____

Key


☐ standard

☐ option

L Seat width ☐34 ☐36 ☐38 ☐40 ☐42 ☐44 ☐46
P Seat depth ☐36 ☐38 ☐40 ☐42 ☐44
HS Back-rest height ☐27 ☐29 ☐31 ☐33 ☐35 ☐37 ☐39
HA Front seat/floor height ☐46 ☐48 ☐50
HP Rear seat/floor height ☐43 ☐45 ☐47
DP Foot-rest/seat distance ☐31 ☐33 ☐35 ☐37 ☐39 ☐41 ☐43 ☐45 ☐47 ☐49 cm

VENUS ADVENTURE

Tit.& al. dampened rigid frame

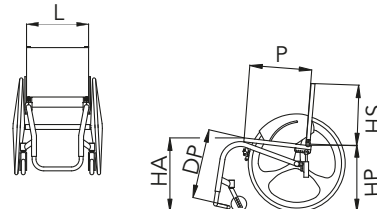

Frame colour

①

- ☐ Shiny titanium ☐ Natural Titanium
☐ Camouflage ☐ Matte black
☐ (see "Colours" catalogue)
☐ Neon green ☐ Neon orange

Upholstery

②

- ☐ Tension adjustable nylon backrest
☐ Tension adj. breathable backrest
☐ Without any back-rest upholstery
☐ **FAMEKH** (separate order form)
☐ other seating system:

Upholstery colour

- ☐ Black
☐ Coloured (nylon).....
 colours: orange, red, green, cornflower, light blue
☐ Coloured (breathable).....
 colours: red, grey)

Single tubular footplate

③

- ☐ Open ☐ Carbon fibre closed ☐ Tilt adjustable Carbon fibre closed


Push handles

④

- ☐ Without pushing handles ☐ Standard pushing handles ☐ Height adjustable pushing handles ☐ Foldable pushing handles

Distance between the hub centre and backrest


⑤



- ☐ 4 cm
☐ 5 cm
☐ **7 cm** (standard)
☐ 9 cm
☐ 11 cm

Backrest tilt

⑥



- ☐ 89° ☐ **91° (standard)** ☐ 93°

☒ **Frog Legs (included)**

⑦



User weight: kg

Side-guards

⑧




- ☐ Straight aluminium, same colour
☐ Straight aluminum, matte black

Brakes


⑨

- ☐ Push brake (stand.)
☐ Pull brake
☐ Scissor brake



Anti-tip device

⑩



- ☐ Right
☐ Left

Notes

☐ Order N° _____ ☐ Quotation
 Date _____ Signature _____
 Customer Ref. _____

PAGE 2/2
 May 2024

VENUS
 ADVENTURE

Dealer _____

Rear wheels

⑪

- ☐ 24" (36 spokes)
- ☐ 24" Mountain-bike with Citybike tyre
- ☐ 24" Mountain-bike with Offroad tyre
- ☐ 24" Spinergy LX
 spokes colour.....(black def.)
- ☐ 25" Spinergy LX
 spokes colour.....(black def.)

Tyres

- ☐ Pneum. Marathon Plus
- ☐ Pneum. high pressure Smooth
- ☐ Pneum. high pressure Plugged 24"
- ☐ Solid black KIK 24"

Handrims

⑫

- ☐ Aluminium silver
- ☐ Aluminium dark
- ☐ Chromium-plated steel 24"
- ☐ Rubber coated
- ☐ Titanium
- ☐ CarboLife CURVE L 24" *
- ☐ CL Curve L TetraGrip 24" *
- ☐ CL Quadro rubber ctd 24" *
- ☐ CarboLife GEKKO 24" *
- ☐ Silicon covers 24"

* not available with Mountain bike wheels

Rear wheel camber


⑬

- ☐ 1° ☐ 2° ☐ 3° ☐ 4°

- ☐ Quick rel.axles Ø 12mm with
 cambered bushes length 42 mm (default)
- ☐ Quick rel. axles Ø 1/2" (12,7mm)
 w/42mm bushes
- ☐ Quick rel. axles Ø 1/2"
 (12,7mm) w/50mm bushes

Backrest bar

⑮



- ☐ Standard:
 P(bar) 7,5cm;
 H(bar) 19cm;
 dia 21mm.
- ☐ Custom:
 P.....cm;
 H.....cm.


Front castors

⑭


- ☐ 80 (3") solid
- ☐ 80 (3") solid with lights
- ☐ 100 (4"x1.1/4) solid with plastic rim
- ☐ 100 (4"x1) solid with lights
- ☐ 100 (4"x1.1/4) solid with alum. rim
- ☐ 125 (5"x1.1/4) solid with plastic rim
- ☐ 125 (5"x1.1/4) solid with alum. rim
- ☐ 125 (5"x1) solid with lights

Pockets


⑯



- ☐ Small under the seat



- ☐ Big under the seat



- ☐ On the back-rest

Lined cushion

in foam polyurethane

⑰



- ☐ 3 cm high
- ☐ 5 cm high

Options

- 18 ☐ "M+F" velcro strips (hook and loop) on seat
- 19 ☐ "M" velcro strips (hook) on seat
- 20 ☐ "F" velcro strips (loop) on seat
- 21 ☐ Catheter holder pocket
- 22 ☐ Pump for pneumatics
- 23 ☐ 45° pelvic belt
- 24 ☐ 45° padded pelvic belt
- 25 ☐ Black backpack
- 26 ☐ Front protective covers

Notes